


Onvif setup on Ernitec EDNS P6000 series

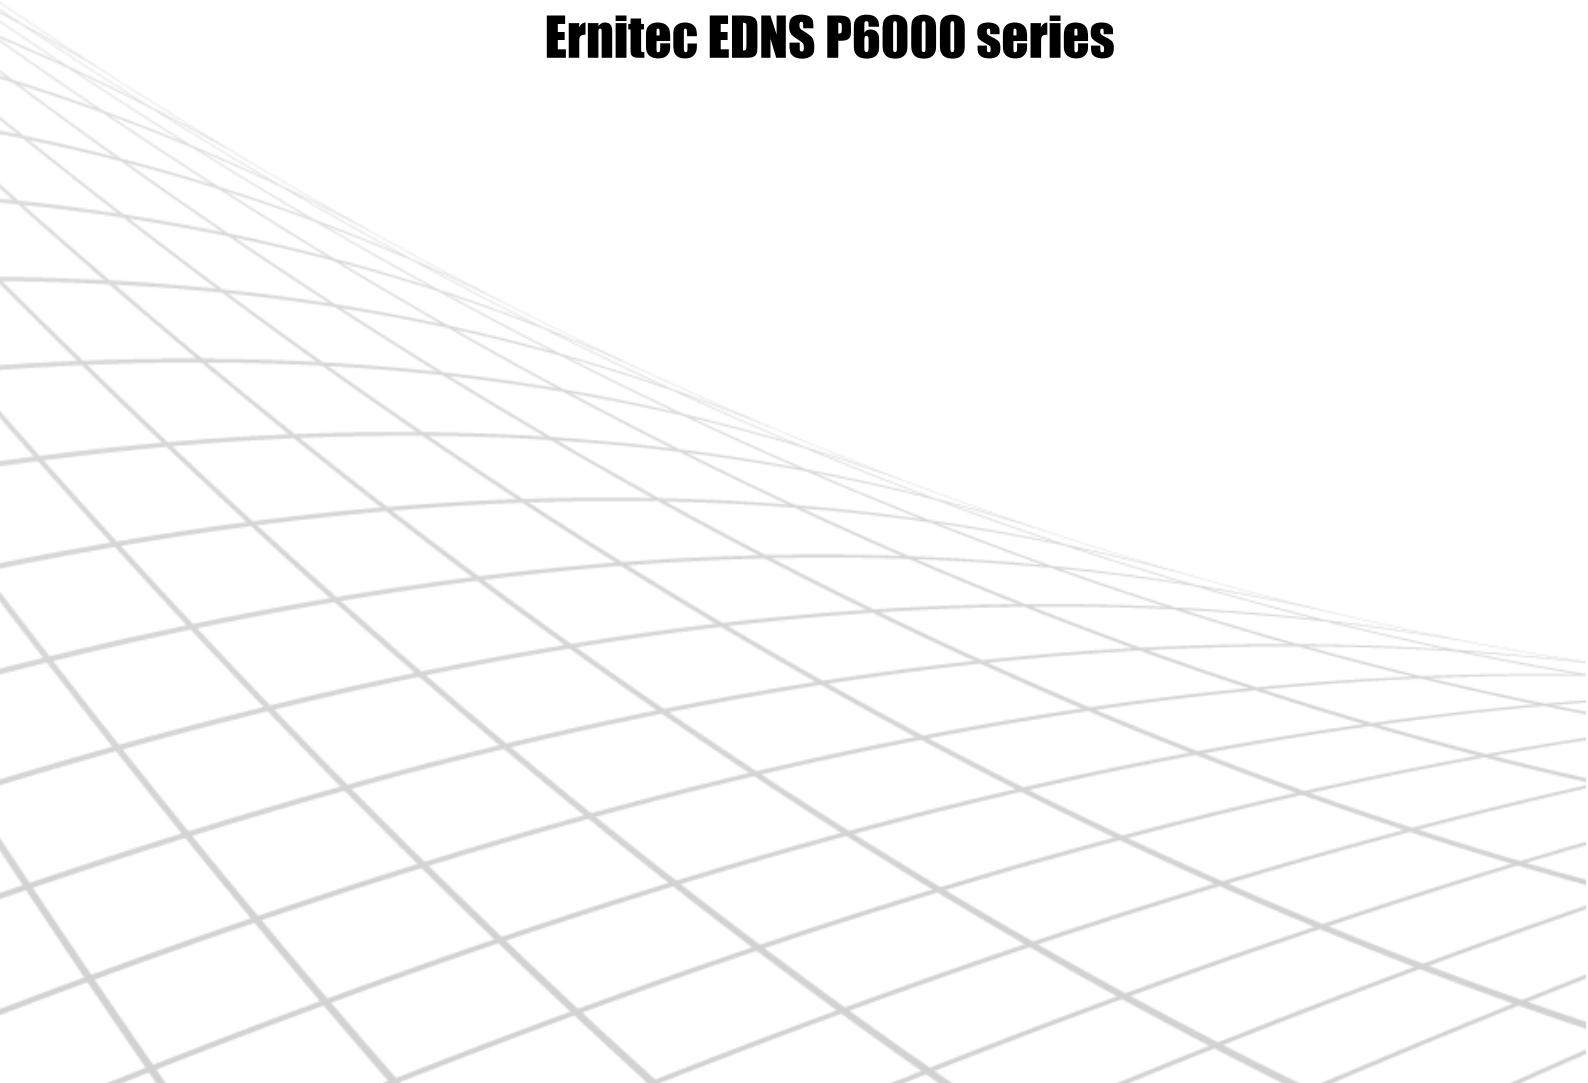

Recorder with this firmware works with ONVIF compliant devices on the Profile S.
 Make sure your devices support ONVIF profile S.


Model Name	EDNS P6008
Video System	PAL
Hardware	A4CB-1007-9A42
Software	0191-0324-0709-8769
DSP	0072-0090-0000-0187
MAC Address 1	00:D0:89:0D:41:EA
MAC Address 2	00:D0:89:0D:41:EB



Configuration on CH1 for that camera:

IP Camera Name: CH1 IP
 Camera Hidden: OFF
 Enable PnP: OFF
 Hostname/IP: 192.168.50.89
 Model: ONVIF


Connection setup:

Account: admin
 Password: admin
 Management Port: 80
 Main Stream Setup: h.264/ON/Stream1/554/RTP+RTSP
 Dual Stream Setup: No/Yes/H264/OFF/Stream2/554/RTP+RTSP
 IP Dome Protocol: None
 IP Dome ID: 0
 Device Setup: Status:

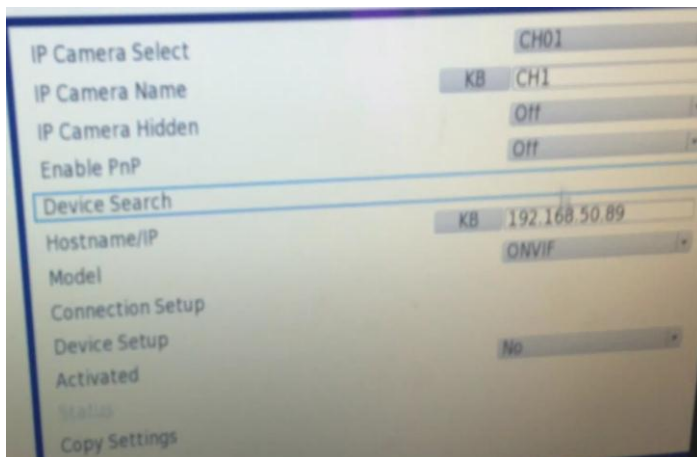

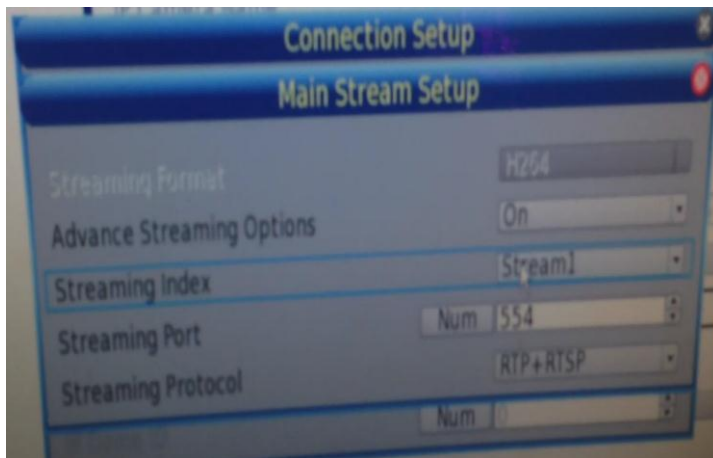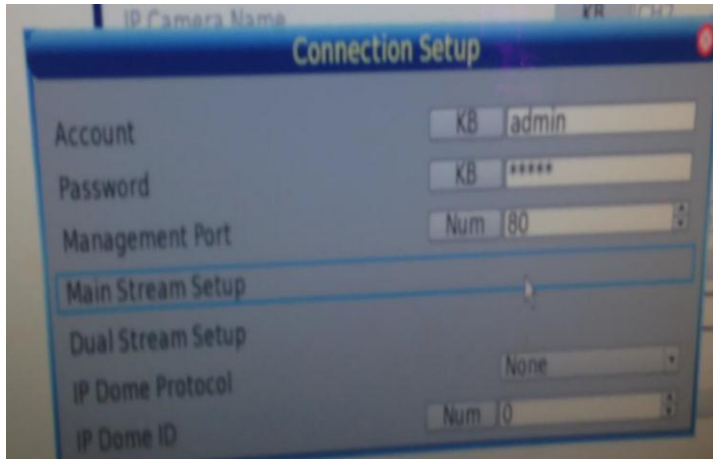

Remember to press Device setup to set resolution and FPS before activating the camera

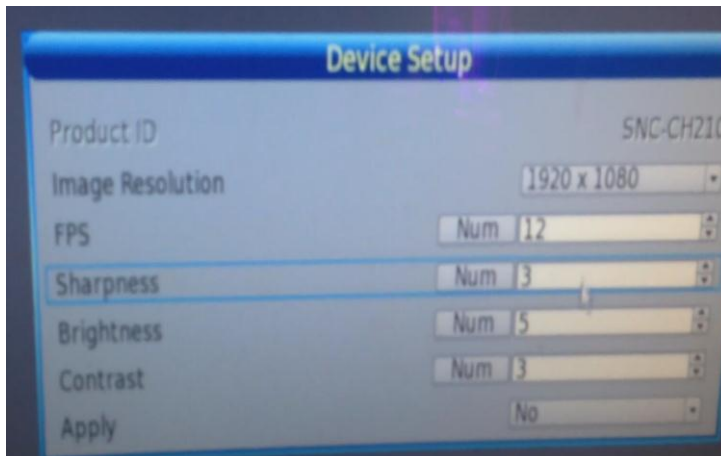

And then MOST important.. – have patience !!! – wait at least 5 minutes before all cameras are loaded and running on the screen

If you want to see a video on “how to” – please look at this link:

<https://dl.dropbox.com/u/577788/Ernitec/6008%20with%20ONVIF.mp4>