ernitec

TANELE			Carrow CO
-		Laurante and the s	
Cassies.	Sandana S		
Ring of the		Augustano ante a	Line or ann ann

Pegasus Build-ESR1800R

16bay Rack Surveillance Server

- 1800 Megapixel fps recording
- Dual Gigabit Network Card
- 16 Hot Swappable HDD bays
- 1GB Graphic controller
- ESR Smart Recovery solution
- Windows[®] OS installed in a RAID 1
- Dual Power Supply
- 3 year Warranty

1800 Megapixel

The Build-ESR1800R is a powerful video surveillance recorder that's optimized to work with CCTV recording Software for sensitive & long-term storage of IP/Megapixel cameras.

Optimized for Surveillance

The Build-ESR1800R is engineered to optimize the way the processor, memory, graphics, OS and software technology work together to deliver massive recording power.

Tuned and Tested

All systems have been hardware tested over 24 together with more than 60 unique systems settings before leaving the assembling line to make sure that the server will run 24 hours per day, year after year.

Ernitec Smart Recovery

Bringing new standards to the market with a specially developed configuration GUI for language selection and network settings that simplifies the installation together with the unique ESR software developed by Ernitec to back-up the complete machine including OS and VMS settings.

Hardware Monitoring

Special hardware management software and the ESR INFO notification server give you early warnings if a problem is detected so you can keep your server health.

Dual Power Supply

The Build-ESR600R has the benefit of a dual power supply, so if one fails your notified and a replacement can be changed with the server still running with no down time for your CCTV system.


Follow us on

Linked in

© 2015 Ernitec. All rights reserved www.ernitec.com


Ernitec Tempovej 41 2750 Ballerup Denmark

- Ernitec Smart Recovery is the first and currently only recovery tool for surveillance servers that is designed especially for the surveillance market.
- ESR can save you a huge amount of time and money on trying to find an error now fault finding software errors can be carried out on site with the use of this unique tool.

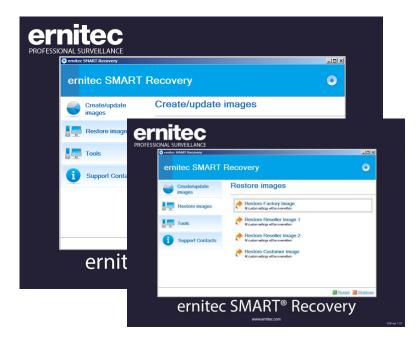

- Backup the complete machine including OS and VMS settings.
- With ESR you no longer have to think about having a backup of every system you use.
- The most reliable recovery solution for surveillance servers on the market.
- Choose between Factory, Reseller 1, Reseller 2 and Customer image that can boot your server, even after a severe crash.

- Recover the complete machine including OS and VMS settings.
- ESR works on Windows 7, 8, 2008 & 2012 operating system and its applications without re-installation.
- ESR is pre-installed on all Ernitec ESR servers

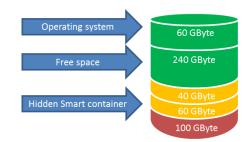





© 2015 Ernitec. All rights reserved www.ernitec.com Tempovej 41 2750 Ballerup Denmark Customize options for the Build-ERS survaliance server, enables you to design the server to the project requirments. All hard drives are Enterprice performance rated which are optimized for 24/7 sursurvaliance use. The hardware 8ch RAID controller supports 1.5, 3.0 and 6.0 Gb/s SAS and SATA data transfer rates on all channels and the professional graphics card renders pristine image quality on up to four Display Port monitors at resolutions up to 2560 x 1600 per output.

Drive Options	
SATA Drives	
Build-1TB-SATA-HDD-ESR	24/7 HDD SATA industrial 7200rpm
Build-2TB-SATA-HDD-ESR	24/7 HDD SATA industrial 7200rpm
Build-3TB-SATA-HDD-ESR	24/7 HDD SATA industrial 7200rpm
Build-4TB-SATA-HDD-ESR	24/7 HDD SATA industrial 7200rpm
Build-6TB-SATA-HDD-ESR	24/7 HDD SATA industrial 7200rpm
SAS Drives	
Build-1TB-SAS-HDD-ESR	24/7 HDD SAS, 7200rpm optimized for RAID controller
Build-2TB-SAS-HDD-ESR	24/7 HDD SAS, 7200rpm optimized for RAID controller
Build-3TB-SAS-HDD-ESR	24/7 HDD SAS, 7200rpm optimized for RAID controller
Build-4TB-SAS-HDD-ESR	24/7 HDD SAS, 7200rpm optimized for RAID controller
Build-6TB-SAS-HDD-ESR	24/7 HDD SAS, 7200rpm optimized for RAID controller
Build-300GB-SAS-15K-HDD-ESR	24/7 HDD SAS, 15000rpm optimized for RAID controller
SSD Drives	
BUILD-512GB-SSD-HDD-ESR	24/7 HDD SSD for high speed live database requirements
BUILD-1TB-SSD-HDD-ESR	24/7 HDD SSD for high speed live database requirements





RAID	
Build-8ch-RAID-controller	8ch controller, 6 GB/s per port, 0,1,5,6,10,50,60 + hot spare
Build-RAID0-Setting	RAID config setting
Build-RAID1-Setting	RAID config setting
Build-RAID5-Setting	RAID config setting
Build-RAID10-Setting	RAID config setting
Build-RAID50-Setting	RAID config setting
Build-RAID6-Setting	RAID config setting
Build-RAIDJOBD-Setting	RAID config setting
Build-hotspare	RAID config setting

Opperating System	
BUILD-WIN2012R2-STD-ESR	OS upgrade option to Windows Server 2012
Build-Upgrade-OS-SSD-2-ESR	Upgrade OS drive to two SSD drive



CPU

BUILD-CPU-UPGRADE TO 1800MP-ES


INTEL XEON E3-1245V3, 3,3GHz LGA1150 upgrade option for Build-ESR600

Graphic controller Build-ERC-4monitor

Graphic card for 4 monitors with 4 display port or 4 DVI output

Follow us on





ΟΠΛΙΕ

Ernitec Tempovej 41 2750 Ballerup Denmark Customize options for the Build-ERS survaliance server, enables you to design the server to the project requirments. This includes instlation of analog capture cards for hybrid recorders and Ernitec EVR VMS software all pre loaded in our factory.



Software Options	
BUILD-EVR	Factory installation of Ernitec EVR VMS
Build-EVR-PRO-1	Factory installation of Ernitec EVR Pro Version, 1 channel IP NVR & DVR license, Max 5 users, 1 server, 50 cameras per server.
BUILD-EVR-ENT-1	Factory installation of Ernitec EVR Enterprise Version, 1 channel IP NVR & DVR license, max 10 users, 5 servers, 64 cameras per server



Software Options

BUILD-VCA-1CH-A

Factory Installation of 1 Channel Video Analytics Advance Surveillance with people counting



Capture Card BUILD-EVR-16ANA-CARD-ONLY

Factory installation of 16 Channel High performance H264 Hybrid capture card, hardware compression with full D1 resolution on all channels resolution up to 400fps@D1 (704 x 576 pixels) BUILD-ESR600 will accept 2 x 16ch Analog capture cards

Follow us on





www.ernitec.com

Ernitec Tempovej 41 2750 Ballerup Denmark

Technical Specification Ernitec Build-ESR1800R

Features		Power		
Recording frame rate at resolution 1280 x 720	*Up to 1800/sec in H.264	Redundant PSU	920W (1+1) high-efficiency (94%+) AC-DC Redundant power supplies with PMBus	
System Hard drive with OS	2 in RAID 1 (1+1)	-	and I2C	
Optical drive	DVD-RW	Power requirements	100v -240V AC/50-60Hz/920W	
Graphic controller for 2 monitor output Ernitec ESR software	**1GB - 1xVGA, 1xDVI-D, 1xHDMI, 1xThunderbolt (op to 2560x1600) Yes	Management Power Configurations	ACPI / ACPM Power Management, Main Switch Override Mechanism, Wake-On-	
Ernitec ESR INFO Auto-rebooting after	Yes Yes	-	LAN (WOL) header, Keyboard Wakeup from Soft-Off, Power-on mode for AC	
power failure	103	Software	power recovery SuperDoctor III	
Storage				
Storage interface	SATA / SAS with RAID controller option	Dimensions / Weights		
Storage included	-	Form Factor	3U 19" Rack Frame	
Storage bays	16 x 3,5" hot swap bays	- Rack Rails	Yes	
RAID controller	16ch controller, 6 GB/s per port, 0,1,5,6,10,50,60 + hot spare	- Dimensions (HxWxD mm)	132x437x648	
Storage hard drive options	see upgrade options for more info	_ Weight	34,7KG	
OS support		General		
OS	Windows 7 ultimate 64bit	Languages	25 including : English, German, French, Spanish, Dutch, Danish, Italian, Finnish	
Upgrade option; Win OS	Windows 2012R2 64bit	Operation conditions	Temperature range from +5°C to +35°C	
CPU / Memory			-	
CPU	INTEL Core I5-4440 3,1GHz LGA1150 6MB	Operating Relative Humidity Range	8% ~ 90% (non-condensing)	
Upgrade option; CPU	INTEL XEON E3-1245V3, 3,3GHz LGA1150	warranty	3 years	
Memory	4x 2GB DDR3 1333MHz (8GB)	Included accessories	1x OPTICAL MOUSE BLACK/USB PS2, CAT6	
Cooling			2M GREY, CAT6 2M BLUE, Power Cord	
Fan type	3x 80mm Hot-swap 4-pin PWM Fans 2x 80mm Rear-exhaust 4-pin PWM Fans	Part number	schuko 2M , Power 2M UK, Build-ESR1800R	
Hot swap Fan	5	-		
On-Board Devices				
Keyboard / mouse	USB connector			
Chipset	Intel [®] C226 Express PCH			
Audio	HD Audio 7.1 channel connector by Realtek ALC1150			
USB ports	8x USB 3.0 (4 rear + 4 via headers) 6xUSB 2.0 (2 rear + 4 via headers)			
Network card	Dual Gigabit Ethernet LAN ports (1x Intel® i217LM & 1x Intel® i210AT)			
Embedded RAID Controller	Embedded Onboard RAID for system hard			

DISTRBUTED BY



We reserve the right to introduct product modifications without notice



drive

*Tested with Ernitec DVMS 6.4.3 and Ernitec Mercury SX302IR * *Using different cables with the on board graphic card can cause small

differences to the images on the monitors connected

Οηνιγ © 2015 Ernitec. All rights reserved www.ernitec.com

Tempovej 41 2750 Ballerup Denmark