



# Pegasus Build-ESR600R

**8bay Rack Surveillance Server** 

- 600 Megapixel fps recording
- Dual Gigabit Network Card
- 8 Hot Swappable HDD bays
- 1GB Graphic controller
- ESR Smart Recovery solution
- Windows® OS installed in a RAID 1
- Dual Power Supply
- 3 year Warranty

### 600 Megapixel

The Build-ESR600R is a powerful video surveillance recorder that's optimized to work with CCTV recording Software for sensitive & long-term storage of IP/Megapixel cameras.

### **Optimized for Surveillance**

The Build-ESR600R is engineered to optimize the way the processor, memory, graphics, OS and software technology work together to deliver massive recording power.

#### **Tuned and Tested**

All systems have been hardware tested over 24 together with more than 60 unique systems settings before leaving the assembling line to make sure that the server will run 24 hours per day, year after year.

#### **Ernitec Smart Recovery**

Bringing new standards to the market with a specially developed configuration GUI for language selection and network settings that simplifies the installation together with the unique ESR software developed by Ernitec to back-up the complete machine including OS and VMS settings.

#### **Hardware Monitoring**

Special hardware management software and the ESR INFO notification server give you early warnings if a problem is detected so you can keep your server health.


#### **Dual Power Supply**

The Build-ESR600R has the benefit of a dual power supply, so if one fails your notified and a replacement can be changed with the server still running with no down time for your CCTV system.

Follow us on


### **Ernitec Smart Recovery software**

- Ernitec Smart Recovery is the first and currently only recovery tool for surveillance servers that is designed especially for the surveillance market.
- ESR can save you a huge amount of time and money on trying to find an error now fault finding software errors can be carried out on site with the use of this unique tool.

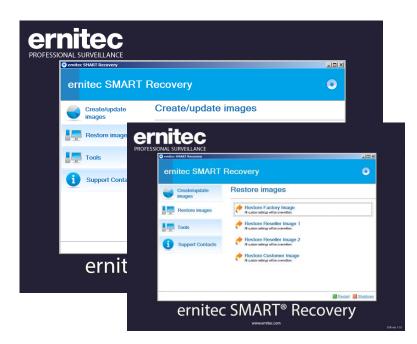

- Backup the complete machine including OS and VMS settings.
- With ESR you no longer have to think about having a backup of every system you use.
- The most reliable recovery solution for surveillance servers on the market.
- Choose between Factory, Reseller 1, Reseller 2 and Customer image that can boot your server, even after a severe crash.

- Recover the complete machine including OS and VMS settings.
- ESR works on Windows 7, 8, 2008 & 2012 operating system and its applications without re-installation.
- ESR is pre-installed on all Ernitec ESR servers



## **Upgrade options**

Customize options for the Build-ERS survaliance server, enables you to design the server to the project requirments. All hard drives are Enterprice performance rated which are optimized for 24/7 sursurvaliance use. The hardware 8ch RAID controller supports 1.5, 3.0 and 6.0 Gb/s SAS and SATA data transfer rates on all channels and the professional graphics card renders pristine image quality on up to four Display Port monitors at resolutions up to  $2560 \times 1600$  per output.

Drive Options	
SATA Drives	
Build-1TB-SATA-HDD-ESR	24/7 HDD SATA industrial 7200rpm
Build-2TB-SATA-HDD-ESR	24/7 HDD SATA industrial 7200rpm
Build-3TB-SATA-HDD-ESR	24/7 HDD SATA industrial 7200rpm
Build-4TB-SATA-HDD-ESR	24/7 HDD SATA industrial 7200rpm
SAS Drives	
Build-1TB-SAS-HDD-ESR	24/7 HDD SAS, 7200rpm optimized for RAID controller
Build-2TB-SAS-HDD-ESR	24/7 HDD SAS, 7200rpm optimized for RAID controller
Build-3TB-SAS-HDD-ESR	24/7 HDD SAS, 7200rpm optimized for RAID controller
Build-4TB-SAS-HDD-ESR	24/7 HDD SAS, 7200rpm optimized for RAID controller
Build-300GB-SAS-15K-HDD-ESR	24/7 HDD SAS, 15000rpm optimized for RAID controller
SSD Drives	
BUILD-512GB-SSD-HDD-ESR	24/7 HDD SSD for high speed live database requirements
BUILD-1TB-SSD-HDD-ESR	24/7 HDD SSD for high speed live database requirements





RAID	
Build-8ch-RAID-controller	8ch controller, 6 GB/s per port, 0,1,5,6,10,50,60 + hot spare
Build-RAID0-Setting	RAID config setting
Build-RAID1-Setting	RAID config setting
Build-RAID5-Setting	RAID config setting
Build-RAID10-Setting	RAID config setting
Build-RAID50-Setting	RAID config setting
Build-RAID6-Setting	RAID config setting
Build-RAIDJOBD-Setting	RAID config setting
Build-hotspare	RAID config setting

Opperating System	
BUILD-WIN2012R2-STD-ESR	OS upgrade option to Windows Server 2012
Build-Upgrade-OS-SSD-2-ESR	Upgrade OS drive to two SSD drive



CPU	
BUILD-CPU-UPGRADE TO 1800MP-ES	INTEL XEON E3-1245V3, 3,3GHz LGA1150
	upgrade option for Build-ESR600
Graphic controller	
Build-ERC-4monitor	Graphic card for 4 monitors with 4 display port or 4 DVI output

### **Upgrade options**

Customize options for the Build-ERS survaliance server, enables you to design the server to the project requirments. This includes instlation of analog capture cards for hybrid recorders and Ernitec EVR VMS software all pre loaded in our factory.




Software Options	
BUILD-EVR	Factory installation of Ernitec EVR VMS
Build-EVR-PRO-1	Factory installation of Ernitec EVR Pro Version, 1 channel IP NVR & DVR license, Max 5 users, 1 server, 50 cameras per server.
BUILD-EVR-ENT-1	Factory installation of Ernitec EVR Enterprise Version, 1 channel IP NVR & DVR license, max 10 users, 5 servers, 64 cameras per server

#### Software Options

BUILD-VCA-1CH-A

Factory Installation of 1 Channel Video Analytics Advance Surveillance with people counting





#### Capture Card

BUILD-EVR-16ANA-CARD-ONLY

Factory installation of 16 Channel High performance H264 Hybrid capture card, hardware compression with full D1 resolution on all channels resolution up to 400fps@D1 (704 x 576 pixels) BUILD-ESR600 will accept 2 x 16ch Analog capture cards

# **Technical Specification Ernitec Build-ESR600R**

Features		P
Recording frame rate at resolution 1280 x 720	*Up to 600/sec in H.264	R
System Hard drive with OS	2 in RAID 1 (1+1)	
Optical drive	DVD-RW	P
Graphic controller for 2 monitor output	` ' '	N Po
Ernitec ESR software	Yes	
Ernitec ESR INFO	Yes	
Auto-rebooting after power failure	Yes	So
Storage		D
Storage interface		
Storage included	-	Fo
Storage bays	8 x 3,5" hot swap bays	D
RAID controller upgrade option	8ch controller, 6 GB/s per port,	( <u> </u> 
Storage hard drive options	se upgrade options for more info	_
OS support		Lá
OS	Windows 7 ultimate 64bit	LC
Upgrade option; Win OS	Windows 2012R2 64bit	_
CPU / Memory		0
CPU	INTEL CORE 15-1/1/10 3 1GHz 1 GA1150 6MR	O
Upgrade option; CPU	INITEL VEONIES ASAEVS S SOULLO ASAES	H W
Memory	4x 2GB DDR3 1333MHz (8GB)	ln
Cooling		
Fan type	80x38mm 4-pin PWM Fans	
Hot swap Fan	3	Pa
On-Board Devices		
Keyboard / mouse	USB connector	
Chipset	Intel® C226 Express PCH	
Audio	HD Audio 7.1 channel connector by	
	Realtek ALC1150	
USB ports	8x USB 3.0 (4 rear + 4 via headers)	
Network card	6xUSB 2.0 (2 rear + 4 via headers)  Dual Gigabit Ethernet LAN ports	
INCLINOIR CUIU	(1x Intel® i217LM & 1x Intel® i210AT)	
Embedded RAID Controller	Embedded Onboard RAID for system hard drive	

Power	
Redundant PSU	720W (1+1) high-efficiency (94%+) AC-DC Redundant power supplies with PM Bus and I2C
Power requirements	100v -240V AC/50-60Hz/720W
Management	
Power Configurations	ACPI / ACPM Power Management, Main Switch Override Mechanism, Wake-On- LAN (WOL) header, Keyboard Wakeup from Soft-Off, Power-on mode for AC power recovery
Software	SuperDoctor III
Dimensions / Weights	
Form Factor	2U 19" Rack Frame
Rack Rails	Yes
Dimensions (HxWxD mm)	89x437x648
Weight	26,6KG
General	
Languages	25 including : English, German, French, Spanish, Dutch, Danish, Italian, Finnish
Operation conditions	Temperature range from +5°C to +35°C
Operating Relative Humidity Range	8% ~ 90% (non-condensing)
warranty	3 years
Included accessories	1x OPTICAL MOUSE BLACK/USB PS2, CAT6 2M GREY, CAT6 2M BLUE, Power Cord schuko 2M, Power 2M UK,
Part number	Build-ESR600R

\*Tested with Ernitec DVMS 6.4.3 and Ernitec Mercury SX302IR

<sup>\* \*</sup>Using different cables with the on board graphic card can cause small differences to the images on the monitors connected





We reserve the right to introduct product modifications without notice