



Pegasus Build-ESR1800

8 bay Tower Surveillance Server

- 1800 Megapixel fps recording
- Dual Gigabit Network Card
- 8 Hot Swappable HDD bays
- 1GB Graphic controller
- ESR – Smart Recovery solution
- ESR INFO
- Windows® OS installed in a RAID 1
- 3 year Warranty

1800 Megapixel

The Build-ESR1800 is a powerful video surveillance server that's optimized to work with CCTV recording Software for sensitive & long-term storage of IP/Megapixel cameras.

Optimized for Surveillance

The Build-ESR1800 is engineered to optimize the way the processor, memory, graphics, OS and software technology work together to deliver massive recording power.

Tuned and Tested

All systems have been hardware tested over 24 together with more than 60 unique systems settings before leaving the assembling line to make sure that the server will run 24 hours per day, year after year.

Ernitec Smart Recovery

Bringing new standards to the market with a specially developed configuration GUI for language selection and network settings that simplifies the installation together with the unique ESR software developed by Ernitec to back-up the complete machine including OS and VMS settings.

Hardware Monitoring

Special hardware management software and the ESR INFO notification server give you early warnings if a problem is detected so you can keep your server health.


Ernitec Smart Recovery software

- Ernitec Smart Recovery is the first and currently only recovery tool for surveillance servers that is designed especially for the surveillance market.
- ESR can save you a huge amount of time and money on trying to find an error – now fault finding software errors can be carried out on site with the use of this unique tool.



- Backup the complete machine including OS and VMS settings.
- With ESR you no longer have to think about having a backup of every system you use.
- The most reliable recovery solution for surveillance servers on the market.
- Choose between Factory, Reseller 1, Reseller 2 and Customer image that can boot your server, even after a severe crash.

- Recover the complete machine including OS and VMS settings.
- ESR works on Windows 7, 8, 2008 & 2012 operating system and its applications without re-installation.
- ESR is pre-installed on all Ernitec ESR servers

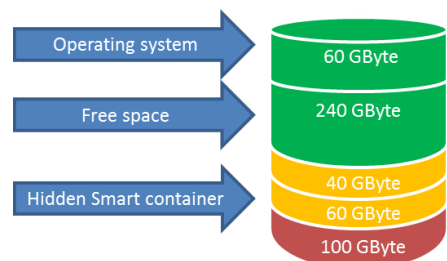

Upgrade options

Customize options for the Build-ERS surveillance server, enables you to design the server to the project requirements. All hard drives are Enterprise performance rated which are optimized for 24/7 surveillance use. The hardware 8ch RAID controller supports 1.5, 3.0 and 6.0 Gb/s SAS and SATA data transfer rates on all channels and the professional graphics card renders pristine image quality on up to four Display Port monitors at resolutions up to 2560 x 1600 per output .

Drive Options

SATA Drives

Build-1TB-SATA-HDD-ESR	24/7 HDD SATA industrial 7200rpm
Build-2TB-SATA-HDD-ESR	24/7 HDD SATA industrial 7200rpm
Build-3TB-SATA-HDD-ESR	24/7 HDD SATA industrial 7200rpm
Build-4TB-SATA-HDD-ESR	24/7 HDD SATA industrial 7200rpm

SAS Drives

Build-1TB-SAS-HDD-ESR	24/7 HDD SAS, 7200rpm optimized for RAID controller
Build-2TB-SAS-HDD-ESR	24/7 HDD SAS, 7200rpm optimized for RAID controller
Build-3TB-SAS-HDD-ESR	24/7 HDD SAS, 7200rpm optimized for RAID controller
Build-4TB-SAS-HDD-ESR	24/7 HDD SAS, 7200rpm optimized for RAID controller
Build-300GB-SAS-15K-HDD-ESR	24/7 HDD SAS, 15000rpm optimized for RAID controller

SSD Drives

BUILD-512GB-SSD-HDD-ESR	24/7 HDD SSD for high speed live database requirements
BUILD-1TB-SSD-HDD-ESR	24/7 HDD SSD for high speed live database requirements



RAID

Build-8ch-RAID-controller	8ch controller, 6 GB/s per port, 0,1,5,6,10,50,60 + hot spare
Build-RAID0-Setting	RAID config setting
Build-RAID1-Setting	RAID config setting
Build-RAID5-Setting	RAID config setting
Build-RAID10-Setting	RAID config setting
Build-RAID50-Setting	RAID config setting
Build-RAID6-Setting	RAID config setting
Build-RAIDJOB-Setting	RAID config setting
Build-hotspare	RAID config setting

Operating System

BUILD-WIN2012R2-STD-ESR	OS upgrade option to Windows Server 2012
Build-Upgrade-OS-SSD-2-ESR	Upgrade OS drive to two SSD drive



CPU

BUILD-CPU-UPGRADE TO 1800MP-ES	INTEL XEON E3-1245V3, 3,3GHz LGA1150 upgrade option for Build-ESR600
--------------------------------	--

Graphic controller

Build-ERC-4monitor	Graphic card for 4 monitors with 4 display port or 4 DVI output
--------------------	---

Upgrade options

Customize options for the Build-ERS surveillance server, enables you to design the server to the project requirements. This includes installation of analog capture cards for hybrid recorders and Ernitec EVR VMS software all pre loaded in our factory.



Software Options

BUILD-EVR	Factory installation of Ernitec EVR VMS
BUILD-EVR-PRO-1	Factory installation of Ernitec EVR Pro Version, 1 channel IP NVR & DVR license, Max 5 users, 1 server, 50 cameras per server.
BUILD-EVR-ENT-1	Factory installation of Ernitec EVR Enterprise Version, 1 channel IP NVR & DVR license, max 10 users, 5 servers, 64 cameras per server

Software Options

BUILD-VCA-1CH-A	Factory Installation of 1 Channel Video Analytics Advance Surveillance with people counting
-----------------	---



Capture Card

BUILD-EVR-16ANA-CARD-ONLY	Factory installation of 16 Channel High performance H264 Hybrid capture card, hardware compression with full D1 resolution on all channels resolution up to 400fps@D1 (704 x 576 pixels) BUILD-ESR600 will accept 2 x 16ch Analog capture cards
---------------------------	---

Follow us on



© 2015 Ernitec. All rights reserved
www.ernitec.com

Ernitec
Tempovej 41
2750 Ballerup
Denmark

Technical Specification Ernitec Build-ESR1800

Features	
Recording frame rate at resolution 1280 x 720	*Up to 1800/sec in H.264
System Hard drive with OS	2 in RAID 1 (1+1)
Optical drive	DVD-RW
Graphic controller for 2 monitor output	**1GB - 1xVGA, 1xDVI-D, 1xHDMI , 1xThunderbolt (op to 2560x1600)
Ernitec ESR software	Yes
Ernitec ESR INFO	Yes
Auto-rebooting after power failure	Yes
Storage	
Storage interface	SATA / SAS with RAID controller option
Storage included	-
Storage bays	8 x 3,5" hot swap bays
RAID controller upgrade option	8ch controller, 6 GB/s per port, 0,1,5,6,10,50,60 + hot spare
Storage hard drive options	se upgrade options for more info
OS support	
OS	Windows 7 ultimate 64bit
Upgrade option; Win OS	Windows 2012R2 64bit
CPU / Memory	
CPU	INTEL XEON E3-1245V3, 3,3GHz LGA1150
Memory	4x 2GB DDR3 1333MHz (8GB)
Cooling	
Fan type	4x 80mm Hot-swap 4-pin PWM Fans
Hot swap Fan	4
On-Board Devices	
Keyboard / mouse	USB connector
Chipset	Intel® C226 Express PCH
Audio	HD Audio 7.1 channel connector by Realtek ALC1150
USB ports	8x USB 3.0 (4 rear + 4 via headers) 6xUSB 2.0 (2 rear + 4 via headers)
Network card	Dual Gigabit Ethernet LAN ports (1x Intel® i217LM & 1x Intel® i210AT)
Embedded RAID Controller	Embedded Onboard RAID for system hard drive

Power	
Fix PSU	665W Super Quiet (25dB) (Bronze Level) High-efficiency PS
Power requirements	100v -240V AC/50-60Hz/500W
Management	
Power Configurations	ACPI / ACPM Power Management, Main Switch Override Mechanism, Wake-On-LAN (WOL) header, Keyboard Wakeup from Soft-Off, Power-on mode for AC power recovery
Software	SuperDoctor III
Dimensions / Weights	
Form Factor	Tower
Dimensions (HxWxD mm)	452x178x648
Rack Kit	Option Part No: RACKKIT
Weight	29,6KG
General	
Languages	25 including : English, German, French, Spanish, Dutch, Danish, Italian, Finnish
Operation conditions	Temperature range from +5°C to +35°C
Operating Relative Humidity Range	8% ~ 90% (non-condensing)
Warranty	3 years
Included accessories	1x OPTICAL MOUSE BLACK/USB PS2, CAT6 2M GREY, CAT6 2M BLUE, Power Cord schuko 2M , Power 2M UK,
Part number	Build-ESR1800

*Tested with Ernitec DVMS 6.4.3 and Ernitec Mercury SX302IR
 ** *Using different cables with the on board graphic card can cause small differences to the images on the monitors connected

DISTRIBUTED BY



We reserve the right to introduce product modifications without notice