

Ernitec EDNS V2108-2TB

8ch H.264 realtime recording DVR



- > 8 ch real-time DVR
- > Up to 200fps recording in D1 resolution
- > 8ch audio inputs and 1ch output
- > 2TB Storage
- > DVD-rw
- > Smart phone and Tablet viewer
- > Built-in web GUI
- > 4 year Warranty

The Ernitec EDNS V2108-2TB is a powerful H.264 DVR, supporting WD1 real-time recording and playback, full HD display. It is designed for users / installers who are willing to upgrade the current analog solution

With H.264 high profile compression, the EDNS V2108-2TB provides up to 8 channel WD1 real-time recording, offering better vision than traditional D1 video quality with the minimum file size; real time dual streaming encoding and recording lets EDNS V2108-2TB sending smooth video to remote client monitoring, especially for delivering real-time video to smartphone devices; motion, event and alarm detections enhance the overall protection for 24 /7 surveillance.

Integrating intuitive GUI and supporting USB keyboard and mouse make system operation of the EDNS V2108-2TB much easier. Moreover, the RemoteManager-II CMS software provide distant accessibility for remote system control.


Users can also do remote surveillance through mobile phone or tablet by using the Ernitec GO APP (iPhone, iPad and Android supported) offers perfect backend solutions for monitoring DVRs at the remote site

Technical Specification – Ernitec EDNS V2108-2TB

Video Input	
Input	BNC x 8, 1.0 Vp-p, 75 ohm
Loop through	BNC x 8, 1.0 Vp-p, 75 ohm
Monitor Output	
1x VGA	1024x768, 1280x1024,
1x Digital Display	1920x1080p
Call Monotor	BNC x 1, 1.0 Vp-p, 75 ohm
Main Monitor	BNC x 1, 1.0 Vp-p, 75 ohm
Audio	
Input	RCA x 8, (line In)
Output (Main / Call)	RCA x 1, (line Out)
Compression Method	G.711
Data Rate	8 KB/s, per ch
Recording	
Compression Method	H.264 High Profile
Recording Mode	Schedule, Alarm, Motion Detection
Pre-alarm	Yes
Max Recording Rate (PAL)	200fps@D1 200fps@2CIF 200fps@CIF
Recording Quality	8 Levels Presets, Adjustable
Dual Stream	25fps@CIF / CH
Storage Mode	Linear / Circular
Data Lifetime	yes (programmable)
Storage	
Build-in Storage	2TB HDD
Build-in Storage Interface	SATA for 3.5" Hard disk
DVD-rw	Yes
Export	2 x USB 2.0 / DVD-rw

Alarm	
Alarm Input	8 x D-SUB, line in
Alarm Relay Output	1 x D-SUB, line out
Alarm Detection	N.C. / N.O. / Programmable
Motion Detection	16 x 12 Grid Array, Sensitivity, Trigger level adjustable
Video Loss Detection	Programmable
Communication	
Network Connectivity	RJ45, 10/100/1000Mbps Ethernet, support PPPoE/ DDNS/ DHCP
RS-485	D-SUB
RS-232C	D-SUB for POS applications
Dome Camera Control Protocol	DSCP, Pelce P, Pelco D, AD422, Fastrax 2, Panasonic, JVC
IR Remote	Yes
Remote Control Software	RemoteManager-II
Remote Operation	Monitoring, Playback, Recording, System setup, Dome camera control, Archiving
General	
Operating System	Embedded Linux
Unit Dimension (W x H x D)	440x 54.5x 340mm
Unit Weight (without storage)	4.5 kg
Package Dimension (W x H x D)	553 x 163 x 452mm
Package Weight (without storage)	5.1 kg
Operation temperature	0°C to +40°C
Operation humidity	10% to 90%
Power requirements	100V -240V AC/50-60Hz/500W
Power unit	External PSU 12VDC,90W
Languages	Multi language support
warranty	4 years
Included accessories	IR remote, Guick guide, User Manual, RemoteManager-II software DVD, UK and Schuko power cable
Part Number	0064-02108-2TB

Optional accessories
Ernitec GO for smart phones and tablet free download

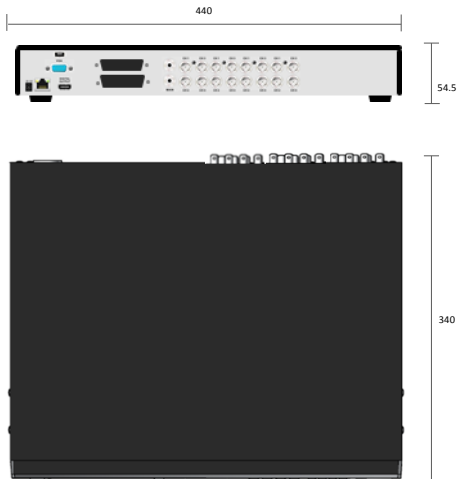

DISTRBUTED BY